

HR800

HIGH PERFORMANCE LARGE AREA ROTARY MOWER



- **LOW MAINTENANCE, DIRECT DRIVE HYDRAULIC DECKS**
- **TRUSTWORTHY KUBOTA ENGINE**
- **HIGH STRENGTH STEEL DESIGN MAKES IT THE LIGHTEST MOWER IN ITS CLASS**

The HR800 high performance large area rotary mower is built to let you work fast without compromising on cut quality. Cut roughs and surrounds quickly with the MARBAIN® Boron Alloy Steel Blades combined with a powerful and trustworthy Kubota® Engine.

The HR800 also has a SureTrac™ Hydrostatic Closed Loop Parallel-Cross-Series Traction System, with minimal maintenance required, it gets you on the job fast and keeps you right on cut.

CUT WIDTH 192" (4.9M)	CUT HEIGHT 1" - 6" (25MM - 152MM) 0.5" (12.7MM) INCREMENTS	CUTTING CAPACITY 21.3^{AC} (8.62HA) / HR AT 11MPH (17.7KM/H)
FUEL CAPACITY 29.5^{GAL} (109.8L)	MOWER ENGINE KUBOTA® 74.3HP (55.4KW) TURBODIESEL	TRANSPORT SPEED 20^{MPH} (32.2KM/H)



SINCERELY

Take

For information and support:
www.jacobsen.com / +44 (0) 1473 270 000 / +1-888-438-3946



Actual operating power output may vary due to conditions of specific use.
Run time will vary based on conditions of specific use, accessories, and terrain.
NOTE: Specifications, while correct at time of printing, may change without notice.

© 2021 Textron Specialized Vehicles Inc.

HR800

HIGH PERFORMANCE LARGE AREA ROTARY MOWER



ISO mounted operator platform

Foldable ROPs as standard

Optional cab, built around your requirements - low maintenance, direct drive hydraulic decks, operator lift lower controls & on-board diagnostics

Easy-access service bay

Fully adjustable tilt steering wheel

Maintenance-free wet parking brakes

Lightweight durable deck pan design made from high strength steel

Bolt together construction for easy deck maintenance and repairs of cut


Jake's widest width of cut



Ease of maintenance, durable cutting decks



Trustworthy, powerful engine

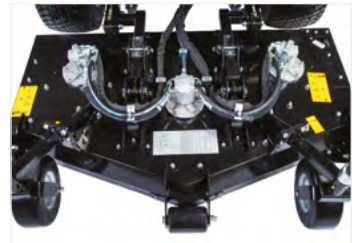

Proven rotary deck design

DECKS & CUTTING UNITS

NUMBER AND SIZE	1 x 72" (1.83m) front deck; 2 x 66" (1.68m) wing units
BLADE MATERIAL	MARBAIN® boron alloy steel
DECK LIFT & LOWER	Individual via fingertip operated joysticks
WEIGHT TRANSFER	On demand electrically operated hydraulic weight transfer system
DECK CONSTRUCTION	11 gauge (3mm) Strenx, high strength steel shell

TRACTION, BRAKES & SPEED

TRACTION DRIVE	Hydrostatic closed loop parallel-cross-series SureTrac™ system
DECK DRIVE	Nine individual hydraulic motors with self lubricating integral bearings
HYDRAULIC SYSTEM	20.3 gal. (76.8L) reservoir with 10 micron remote charge filters and suction screening at tank. Oil cooler in side by side radiator.
SERVICE BRAKES	Dynamic through hydrostatic traction system
PARKING BRAKES	Automatic wet parking brakes integrated into wheel motors
STEERING	Power Steering
MOWING SPEED	11mph (17.7km/h)
REVERSE SPEED	6mph (9.6km/h)

WEIGHTS & DIMENSIONS

WEIGHT (excluding fuel)	4801lbs (2178kg), 5370lbs (2436kg) with cab
LENGTH (less catchers)	147" (3.66m) front deck down
OVERALL HEIGHT (ROPS up)	85" (2.16m)
WHEELBASE	67.4 (1.71m)
TRANSPORT WIDTH	77" (1.96m)
WORKING WIDTH	197" (5.00m)

WARRANTY

MOWER WARRANTY	2 Years
----------------	---------